



Professional Public Address System

EMRM-811 Universal Mixer



OWNER'S MANUAL

Before operating, please read this manual completely.

FEATURES

- 5 microphone inputs, 3 auxiliary inputs, 2 priority inputs, 2 outputs.
- Muting function.
- Individual volume control.
- Bass and Treble tone control.
- Built in chime generator .


Left blank for memo

FRONT PANEL



- ☐ **Power** switch(1 is power on and the “power LED” is on).
- ☐ **Led** Power Indicator.
- ☐ **Bass** control.
- ☐ **Treble** control.
- ☐ **AUX3, 2, 1** volume control.
- ☐ **MIC5, 4, 3, 2, 1** volume control.
- ⑦ **MIC1** input.
- ⑧ **CHIME** button.

REAR PANEL

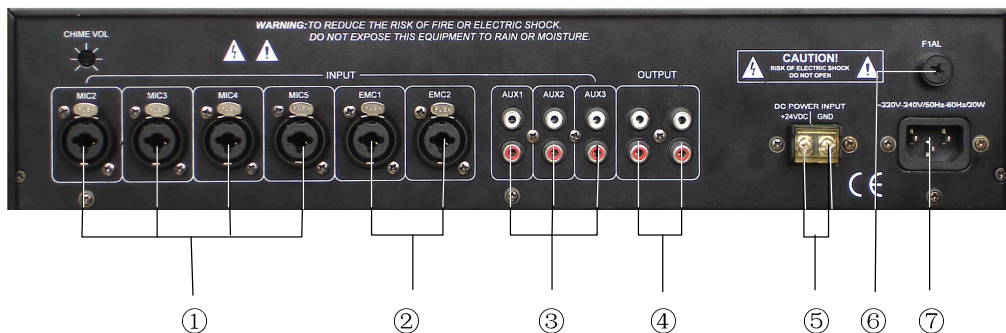


- ☐ **MIC2, 3, 4, 5** inputs.
- ☐ **EMC1, 2** inputs.
- ☐ **AUX1, 2, 3** inputs.
- ☐ Output jacks.
- ☐ **DC24V** Power input
- ☐ **AC** fuse
- ⑦ **AC** power input

MUTING FUNCTION

The **MIC** input **2, 3, 4, 5** and **AUX** input **1, 2, 3** automatically muted by **EMC** input **1, 2**. (**EMC** 1or 2 input overrides the **MIC2, 3, 4, 5** and **AUX 1, 2, 3** signals).

The **MIC** input **2, 3, 4, 5**, **AUX** input **1, 2, 3** and **EMC1, 2** are automatically muted by **MIC1** input (**MIC1** input overrides the other input signals).

CONNECTIONS

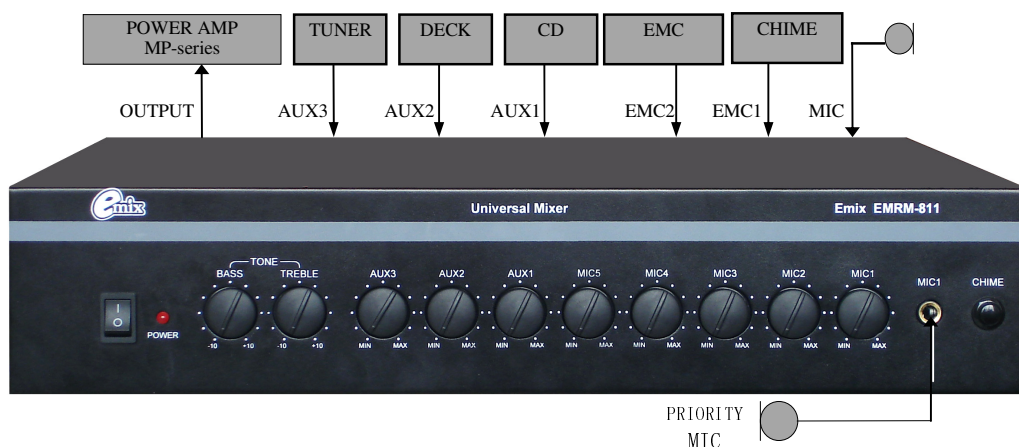

SPECIFICATIONS

Inputs	Mic1, 2, 3, 4, 5: 600 Ω , 2.5mV, balanced Aux1, 2, 3 : 10k Ω , 250mV, balanced
Audio output	0dBV
Frequency response	Mic: 100Hz-10kHz; Line: 20Hz-18kHz (± 3 dB)
Signal/ noise ratio	Mic input : 72dB Aux input : 80dB
Tone	Bass : ± 10 dB at 100Hz Treble : ± 10 dB at 10kHz
Protection	AC fuse
Power Requirement	AC240V/50Hz, DC24V
Dimensions	485 \times 88 \times 365mm
Gross weight	6.5kg
Net weight	5.2kg

Specifications are subject to be changed without notice.

CAUTION

- When the “Power switcher” is off, please pull out the power cord from the socket. Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.