




Public Address System


Ceiling Speaker System EMCS-803




#### FREQ. RESPONSE

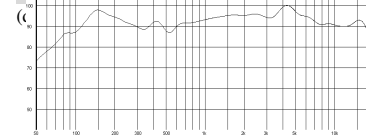


#### DISTORTION

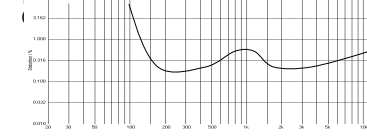

#### DIMENSIONS



#### INSTALLATION HOLE




#### INSTALLATION

1. Cut a  $\varnothing$  178mm ~  $\varnothing$  190mm installation hole on ceiling as shown above.
2. Adjust the clamps of the speaker system suited for different ply of ceiling: Set the tip in upper, middle or lower hole for the ply of 15 to 25mm ceiling.
3. Connect audio broadcasting wire to the terminals according to the table below.

Connection	100V
Green-Red	1W
Green-Black	2W
Green-Blue	3W
Green-Yellow	6W

4. Turn up the clamps of the speaker and insert them into the installation hole on ceiling and then release them as shown below. **Put on your gloves for safe is recommended.**



5. Finally, examine whether it is steady.

## OWNER'S MANUAL

Thank you for purchasing PA speaker system of **EMIX** series. All of **EMIX** series products have been tested strictly before shipping. **EMIX** series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

### FEATURES:

- Working voltage 100V, 1-6W with multiple terminals, suitable for different field;
- Max. Sound Pressure Level  $98 \pm 2$  dB, Effective Freq. Range 50Hz - 18kHz;
- Weight 1.0 kg. It is made of high-class steel and equipped with clamps for mounting convenient;
- With high sensitivity speaker unit ( $90 \pm 2$ dB), sounds clear and sonorousness.

[www.emix.com.my](http://www.emix.com.my)