



Professional Public Address System

EMRM-815 Emergency Microphone Unit



OWNER'S MANUAL


Before operating, please read this manual completely.

FEATURES

- Alarm triggering and siren or recorded signal output.
- 1 minutes digital REC / PLAY IC.
- Record Level control.
- Output volume control.
- Power supply AC240V or DC24V.


Left blank for memo

FRONT PANEL

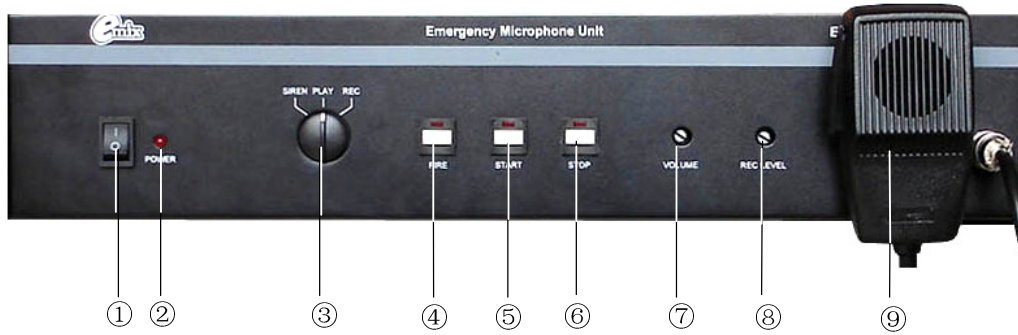


- ① Power switch (1 is power on and the "power LED" is on)
- ② Power indicator.
- ③ OPTION.
SIREN : siren signal output.
PLAY : recorded signal output.
REC : record into IC inside.
- ④ FIRE : manual siren.
- ⑤ START : start recording or playing.
- ⑥ STOP : stop recording or playing.
- ⑦ Output level control.
- ⑧ REC level control.
- ⑨ fire protection MIC

REAR PANEL & CONNECTIONS

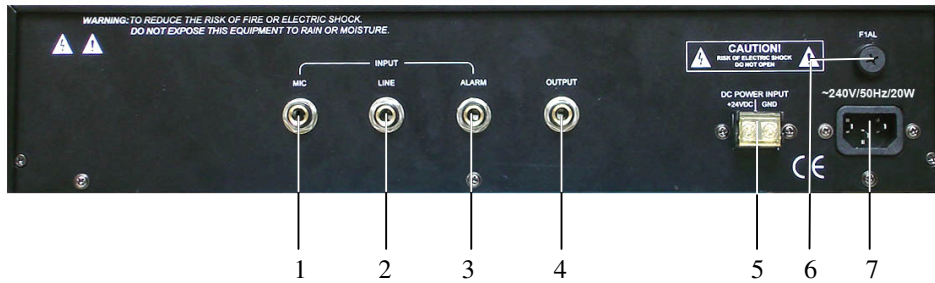

- ① MIC input
- ② Link input
- ③ Alarm input
- ④ Output jack
- ⑤ DC24V power input
- ⑥ AC power fuse
- ⑦ AC power input

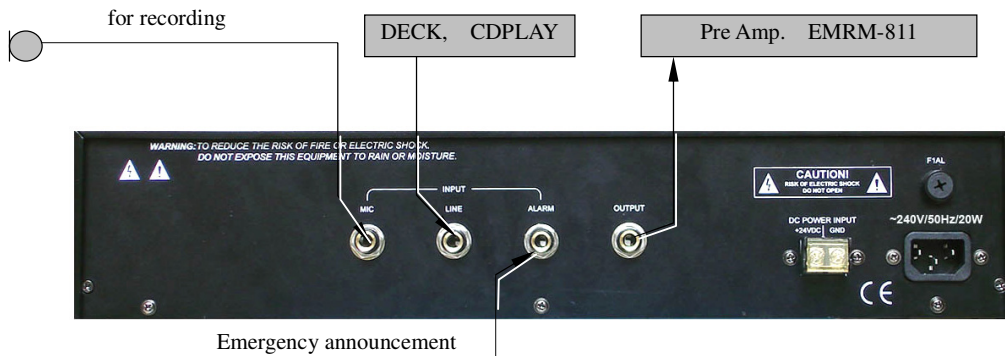

OPERATING

1、AUTO MODE

Plug in the mains regardless the position of “POWER” switch and adjust the knob “VOLUME” properly.

- **Alarm with siren** Put “OPTION” switch at “SIREN” position, as soon as an alarm signal comes into the “ALARM” port, siren will be sent out from “OUTPUT” port until alarm released.
- **Alarm with a message recorded** Put “OPTION” switch at “PLAY” position, as soon as an alarm signal comes into the “ALARM” port, message recorded in inner IC will be sent out from “OUTPUT” port repeatedly until alarm released.

2、Manual mode

Plug in the mains, turn on “POWER” switch and adjust knob “VOLUME” properly.

- **Alarm with siren** Put “OPTION” switch at “SIREN”, as soon as press down “FIRE” button siren will be sent out from “OUTPUT” port until the button released.
- **Alarm with a message recorded** Put “OPTION” switch at “PLAY” position, click “START” button once, message recorded in inner IC will be sent out from “OUTPUT” port until click “STOP” button or the message comes to the end. While the message sending out it also be broken off by click “START” button once again.

3、Recording

Set “OPTION” switch at “REC” position and set “REC LEVEL” at middle position then turn the “POWER” switch on. Click “START” button, signals from “LINE” or “MIC” will be recorded into inner IC chip until press “STOP” button, and it also stop at 1 minutes later too.

SPECIFICATIONS

Inputs	Mic: 2mV, 10k Ω; Line: 0dBV, 10k Ω; Alarm: 0V/+24V(or open), 0V (short circuit) is valid .
Output	SIREN or Recorded Message: 1V
Rec.	IC inside, 60s.
Frequency response	100Hz-10kHz
Protection	AC fuse
Power Requirement	AC240V/50Hz, DC24V
Dimensions	485×88×365mm
Gross weight	6.5kg
Net weight	5.2kg

Specifications are subject to be changed without notice .

CAUTION

- When the “Power switcher” is off, please pull out the power cord from the socket. Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.