




Public Address System


Fireproof Ceiling Speaker System EMCS-904FP




FREQ. RESPONSE

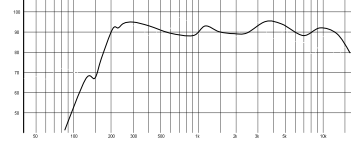

DISTORTION

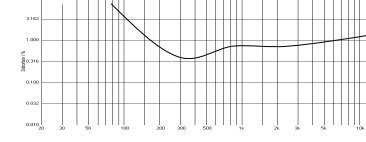


DIMENSIONS



Install the Speaker System only need 15cm depth on your ceiling

INSTALLATION HOLE

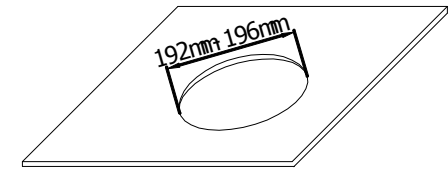

OWNER'S MANUAL

Thank you for purchasing PA speaker system of **EMIX** series. All of **EMIX** series products have been tested strictly before shipping. **EMIX** series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:


- It is made of high-class steel and form by stamping;
- Equipped with wire leading case which hard to burn for fireproof;
- Voltage 100V, 1-6W with multiple terminals, suitable for different field;
- Max. Sound Pressure Level $100 \pm 2\text{dB}$, Effective Freq. Range 200Hz - 14kHz;
- Weight 1.6 kg. Equipped with clamps for mounting;
- With high sensitivity speaker unit ($92 \pm 2\text{dB}$), long life, sounds clear and sonorousness.

INSTALLATION

1. Cut a $\text{Ø}192\text{mm} \sim \text{Ø}196\text{mm}$ installation hole on ceiling as shown above.
2. Adjust the clamps of the speaker system for different ply of ceiling. Set the tip in upper, middle or lower hole for the ply of 15 to 25mm ceiling.
3. Connect audio broadcasting wire to the terminals according to the table below.

Power Terminals	Line Voltage	100V
Green---Red		1 W
Green---Black		2 W
Green---Blue		3 W
Green---Yellow		6 W

4. Turn up the clamps of the speaker and insert them into the installation hole on ceiling and then release them as shown below. **Put on your gloves for safety is recommended.**

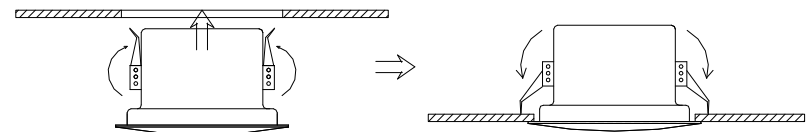

5. Finally, examine whether it is steady.

www.emix.com.my