

# EMRM-908R

## AM/FM Tuner



The **EMIX** EMRM-908R is a tuner to suit various needs of today's public address systems. This unit is the ideal high-quality radio tuner for background music in public address systems. This unit comprises an FM/AM tuner with direct tuning to station frequency or memory preset with Quartz PLL synthesized tuning system.


It is standard 19" rack-mountable with earpieces provided and only takes up 2U of space.

### Features


- > Microprocessor controlled digital tuning system with easy operated soft touch buttons
- > Multi function Vacuum Fluorescent Display
- > Auto scan AM & FM, 20 available channels
- > Random access preset memory
- > Preset memory back up

Model		EMRM-908R
Band	FM	87.0MHz - 108.0MHz (ASIA / USA, 100kHz)
	AM	522kHz - 1620kHz (ASIA / USA, 10kHz)
Sensitivity	FM	16dBu
	AM	49dBu
S/N	FM	Mono 75dB, Stereo 70dB
	AM	40dB
Freq. Step	FM	50kHz
	AM	9kHz
MF	FM	10.7MHz
	AM	450kHz
Output level		650mV / 2.2k $\Omega$
Frequency Response		60Hz - 15kHz $\pm$ 1.5dB
Protection		AC fuse
Power Supply		240VAC $\pm$ 10%, 50/60Hz or DC24V $\pm$ 10%
Dimensions (W X H x D)		485 x 88 x 387mm
Gross weight		4.8kg
Net weight		4kg

### Rear View

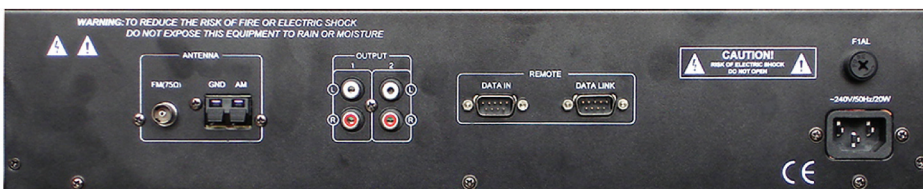

### Schematic Diagram

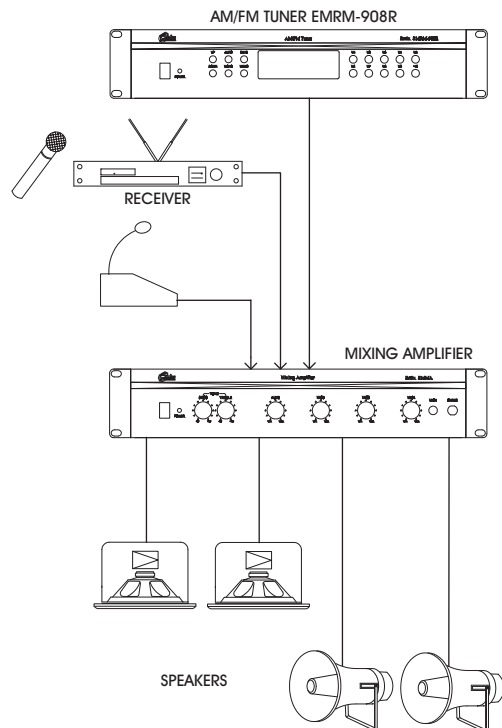

19" RACK MOUNT PA SYSTEM PRODUCT



\*Specifications and design are subjected to change without notice for improvements.