





**Public Address System
Horn Speaker System EMWT154**





FREQ. RESPONSE

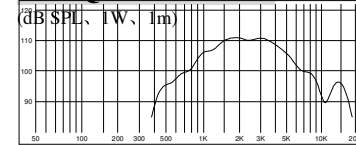

DISTORTION

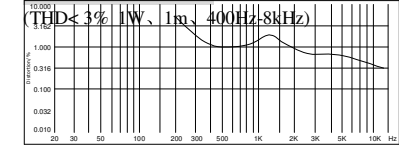

POSITIONING DIMENSIONS & DIAGRAM



OWNER'S MANUAL

Thank you for purchasing PA speaker system of EMIX series. All of EMIX series products have been tested strictly before shipping. EMIX series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:

- The products have gotten waterproof certificate and other certificates and are suitable for outdoor use;
- Equipped with brackets for installation;
- The speaker units have the features of high sensitivity and high dynamic range and different power can be chosen.

SPECIFICATIONS

Freq. Resp	400Hz-8kHz	Rated Power	15W
Sensitivity	105 ± 2dB	Dimension(L × W × H)	195 × 195 × 250mm
Max SPL	117 ± 2dB	Weight	1.7kg

INSTALLATION

1. Fit three $\Phi 8$ mm screws in the position where needed to install a speaker;
2. Set the system in those three screws;
3. Connect audio broadcasting wire to the impedance according to the table below;

	100V
2.0K Ω	5W
1.0K Ω	10W
667 Ω	15W

4. Finally, adjust the direction of the system and examine whether it is steady.