

EMRM-811 Universal Mixer



The **EMIX** EMRM-811 is a versatile and high-performance preamplifier. It comprises 5 microphone inputs, 3 auxiliary inputs, 2 priority inputs and 2 outputs.

This **EMIX** universal mixer has a built-in 2-tone chime to precede announcements. Surprisingly this mixer is capable of fulfilling a wide variety of public address requirements.


It is standard 19" rack-mountable with earpieces provided and only takes up 2U of space.

Features

- > Five universal low-noise input channels for microphone or line.
- > Three Auxiliary inputs for BGM with respective control
- > Priority and emergency relay input
- > Manually triggered input for automated chime to make announcement

Model	EMRM-811
Inputs	Mic 1,2,3,4,5: 600ohm, 2.5mV, Balanced Aux 1,2,3, ; 10kOhm, 250mV, Balanced
Audio Output	0dBV
Frequency Response	Mic: 100Hz-10kHz; Line 20Hz-18kHz(±3dB)
Signal/Noise Ratio	Mic Input: 72dB; Aux Input: 80dB
Tone	Bass: ±10dB at 100Hz; Treble: ±10dB 10kHz
Protection	AC Fuse
Power Supply	240VAC/50Hz, DC24V
Dimensions (W x H x D)	485 x 88 x 365mm
Gross Weight	6.5kg
Net Weight	5.2kg

Schematic Diagram

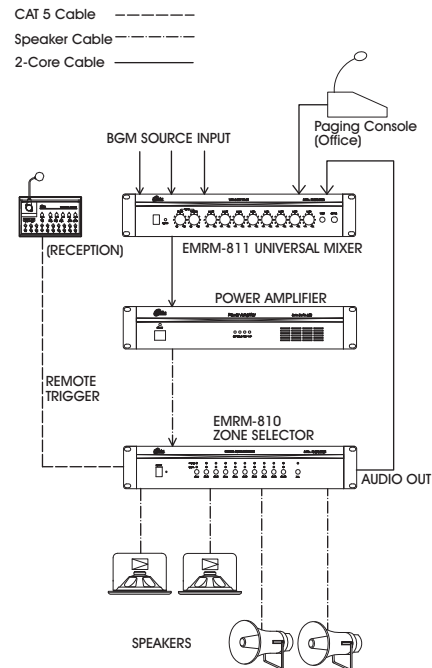

Rear View

