

# EMZS-3310/A Speaker Zone Selector



The **EMIX** Speaker Zone Selector Unit is a simple and straightforward product that is packed with a huge array of capabilities which makes it highly versatile to be used in the most basic Public Address System and the complicated one.

The **EMIX** Speaker Zone Selector Unit main functionality is to allow for the selection of zone for addressing purposes. Prior to any announcement, user can select to which zone(s) the announcement is directed. The **EMIX** Speaker Zone Selector Unit can also integrate with an External Remote Activation Unit (such as the Paging Console EMTM-3001), an External Overriding Module (such as the Emergency Overriding Module EMER-3312) and even cascades with additional Speaker Zone Selector Unit, thus increasing the number of supported speaker zones.

## Features


- > 10 Selectable Speaker Zones
- > All Call Functionality
- > Priority Allocation For Remote/Local Activation
- > Flexible Configuration
- > Interface For Selective Speaker Overriding And Paging Console

## Model

EMZS-3310/A

Input Voltage	24VDC
Current Consumption	350mA
Amplifier Contact Rating	5A
Number of Zones	10 Zones
Zone Selection	10 Zones Via Front Panel Cat Eye Push Button
Remote Activation	Supported Via 15 Way D-Type Connector
Overriding Feature	Remote/Rack Overriding Supported
Number of Amplifier Input	20 (10 Paging and 10BGM)
Output Connector	Pluggable Screw Type Terminal Block
Front Panel Control	10 Push Buttons (10 Zones) 1 All Call Push Button (EMZS-3310A)
Front Panel Indicator	5mm LED Zone Indicator 3mm LED Remote Override
Dimension (W x H x D)	433 x 44.45 x 150mm
Weight (Max)	2.5kg

## Schematic Diagram

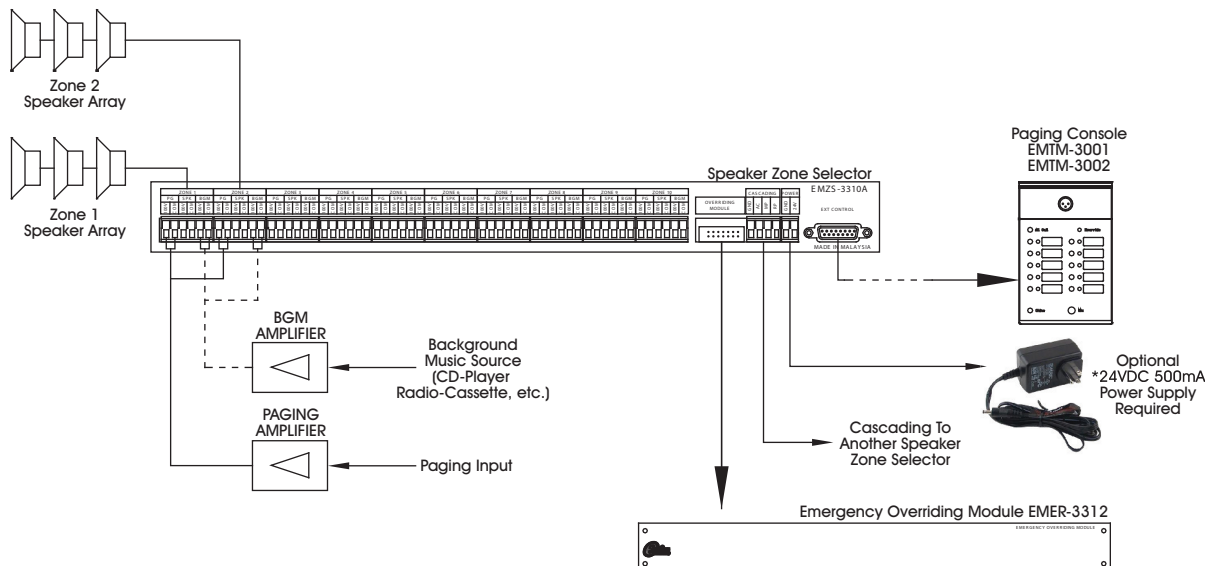

\*Specifications and design are subjected to change without notice for improvements.