

EMRM-810 Speaker Zone Selector



The **EMIX** EMRM-810 is designed for usage when paging is required for a certain zone or zones yet the broadcasted "Background Music" (BGM) to other zones are not interrupted. This will ensure that the comfort level occupants (whilst listening to background music-BGM) of other zones will be maintained. This configuration requires 2 (two) sets of amplifiers, one being dedicated to paging and the other to BGM. EMRM-810 is to be used in conjunction with EMRM-800.

It is standard 19" rack-mountable with earpieces provided and only takes up 2U of space.

Features


- > Multi-level priority paging – Mic 1, Mic 2, Mic 3 and Mic 4
- > Expandable or linkable up to 10 units for more zones.
- > Remote zone paging through EMRM-800 from a range of 300m
- > Press "ALL" call button for all call function
- > Equipped with overriding control

| Model | EMRM-810 |
|------------------------|--|
| No. Of Channel | 10 |
| Input Capacity | 70-100V, 5A |
| Output Capacity | 70-100V, 5A |
| Paging Input | 10 channel, 70-100V |
| BGM Input | 10 channel, 70-100V |
| Volt Capacity | 10 channel, 70-100V 5A |
| Protection | AC fuse x 1 |
| Power Source | AC 240V / 50Hz / DC24V |
| DC Output | DC24V (each outputs should be <2W in 10 outputs) |
| Dimensions (W x H x D) | 485 x 88 x 345 mm |
| Gross Weight | 7.2kg |
| Net Weight | 5.6kg |

Rear View



Schematic Diagram

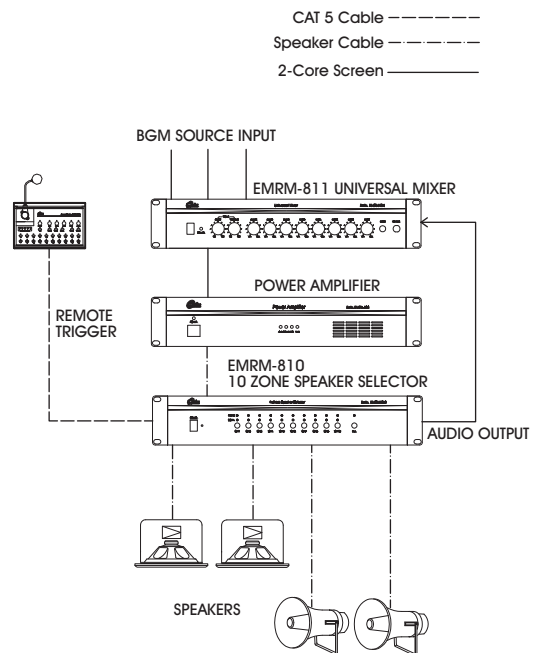

19" RACK MOUNT PA SYSTEM PRODUCT

