



Professional Public Address System

WS-8xx Series Series Aluminium Column Speaker

SPEAKER


www.emix.com.my




TECHNICAL SPECIFICATIONS

	WS-810	WS-820	WS-830	WS-840
Loud Speaker	4inch x 1 4inch x 1	4inch x 2 4inch x 1	4inch x 3 4inch x 1	4inch x 4 4inch x 1
Input	5W / 10W	10W / 20W	15W / 30W	20W / 40W
Frequency Response	150 - 13,000Hz	150 - 13,000Hz	150 - 13,000Hz	150 - 13,000Hz
Impedance	2k Ω / 1k Ω	1k Ω / 500 Ω	666 Ω / 333 Ω	500 Ω / 250 Ω
S.P.L. (at 1w/1m \pm3dB)	90dB	91dB	93dB	96dB
Dimensions(W x D x H)	145 x 120 x 310mm	145 x 120 x 420mm	145 x 120 x 530mm	145 x 120 x 640mm
Weight(kg)	2.6kg	3.4kg	4.5kg	4.9kg

Column Speaker Directivity

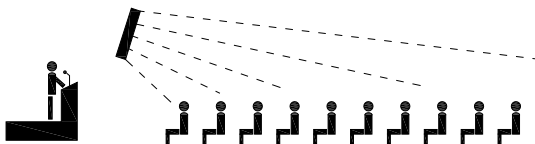

Ordinary Speaker Directivity

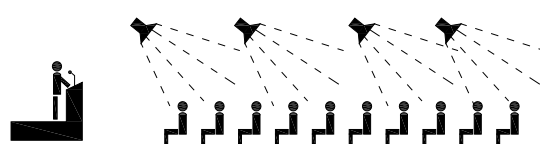

Column Speaker Directivity

Column Speaker are mounted vertically, so they disperse the sound evenly and widely over the audience



Specifications and design are subjected to change without notice for improvements.

WS-8xx Series Series Aluminium Column Speaker